



# État des Lieux 1B


## Assembly instructions



Attention: Read and understand these instructions before installing fixture. This fixture is intended for installation in accordance with National Electric Code and local regulation : to assure full compliance with local code and regulations, check with your local electric inspector before installation. This equipment is guaranteed only when used as indicated in the instructions; therefore they should be kept for future reference. Install where luminaire will be protected from likely damage. This fixture is ceiling mounted only.

### Your box should contain


1x Canopy feed box assembly




1x Support box



1x Glass module



1x Flat cable with light



### Tools needed, not included


- 2x 8-32 screws for junction box
- 5x wire connectors for junction box
- 2x 8-32 screws for ceiling
- Screwdriver phillips and flat

1 First, gently insert the flat cable into the glass globe one side at a time.



Make sure the light globe don't rub the glass globe.

Make sure the light face the desired direction.

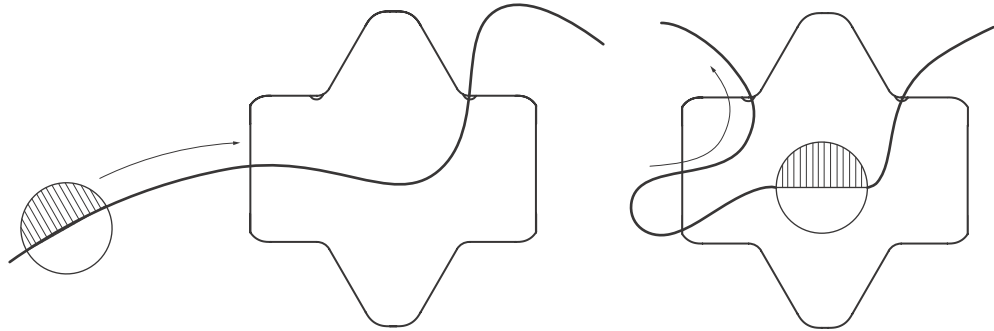


Adjust and set it aside for next steps.



Unpack all components from the box and dispose of the packaging. Please recycle.

2 Measure, mark and drill appropriate hole distance to mount backplate of canopy feed and support to ceiling. Install anchors if needed (not included)

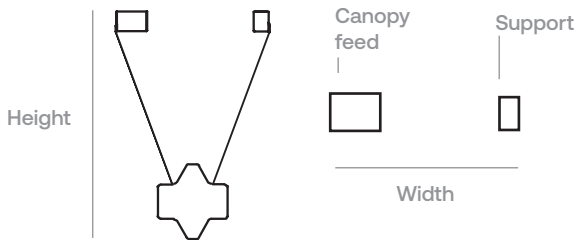

Model	Code	Height	Width	Depth
1B	A	61cm (24in)	46.8cm (18.7in)	
	B	89cm (35in)	64cm (25 1/2in)	28cm (11in)
	C	112cm (44in)	83cm (33in)	
	D	201cm (79in)	156.7cm (62in)	


\*The dimensions are calculated with an angle of 45 deg of strap.

3 Screw backplate in junction box with screw 2x 8-32 machine screws (not included).



Attache ceiling ground wire to backplate ground screw. Make sure other wires go thru backplate center hole as illustrated.



Make sure to install the backplate the side where the strain relief will meet the cable.



4 Make appropriate connexions with wire bundle provided to ceiling wiring. (Shut off main power at the circuit breaker panel)

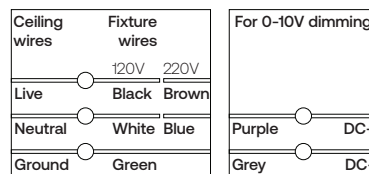

# État des Lieux 1B

## Assembly instructions



Attention: Read and understand these instructions before installing fixture. This fixture is intended for installation in accordance with National Electric Code and local regulation : to assure full compliance with local code and regulations, check with your local electric inspector before installation. This equipment is guaranteed only when used as indicated in the instructions; therefore they should be kept for future reference. Install where luminaire will be protected from likely damage. This fixture is ceiling mounted only.

**5** First, clip wire connectors.

Then, install driver block with wing nuts provided (push connectors in junction box when installing).

Driver  
Red +  
Black -

Controller  
Red +  
Black -

**6** Screw support backplate on ceiling (screws not included).

Make sure to install the backplate the side where the strain relief will meet the cable.

**7** Pass the flat cable in strain relief in canopy and screw it in place. (Loosen captive screws for better passing of cable)

Then, screw on each side of cable to retain it in place.

You can adjust height of luminaire by pushing the cable in canopy.

**8** Leveling can be done by making sure the cable is in line in strain relief.

**9** Repeat cable installation of steps 7 and 8 with support.

**10** Install canopy cover. Use 2x flat screw provided.

**11** Make connections with domino and flat cable in canopy.

Clip white connectors together.

Domino

LED C — Blue  
LED + — White  
LED W — Yellow

**12** Install canopy cover by sliding up and curving slightly the flat cable to pass the cover.

Screw in place with 2x flat screw provided. (Lift cable out of the way for better access)

**13** Make sure the light engine is centered in the glass. Leveling can be done by making sure the cable is in line in glass.